





CART G40 RT TANDEM

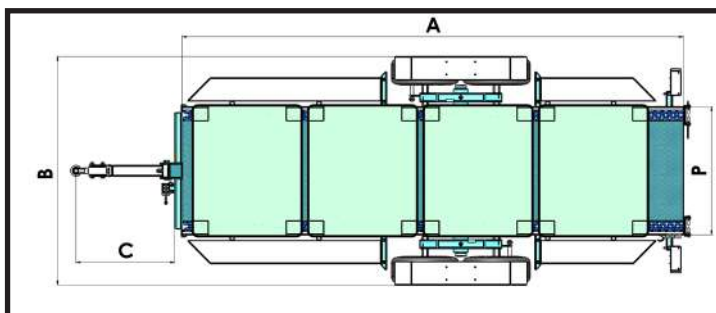

- Cut-tube profile with chassis structure 150x150
- WITH HYDRAULIC FRONT CYLINDER FOR UNLOADING THE BINS WITH TRACTOR OIL OPERATION
- 200 mm Side movable foot-boards to easily reach the 2nd lane of the bins
- Independent tandem axle
- Axle with mechanical brake
- Removable drawbar
- Adjustable double wheel roll track for bin unloading
- Particularly suitable for transporting products without causing damage from impact
- On-road Light kit
- Height adjustable towing device


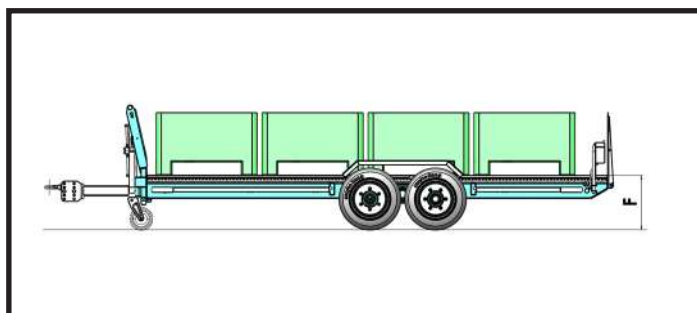


Mod. G40 RT TA BINS 113x113 - 120x110



MOD.	N. Cassoni	A mm	B mm	C mm	P mm	F mm		 Kg	€
G40 RT/4 TA	4	4570	1950	1000	1250	550	200/60 14.5	680	
G40 RT/S TA	6 Pallet 120x80	4900	1950	1000	1250	550	200/60 14.5	720	
G40 RT/5 TA	5	5700	1950	1000	1250	550	200/60 14.5	800	

Mod. G40 RT TA SA BINS 120x100 - 120x80

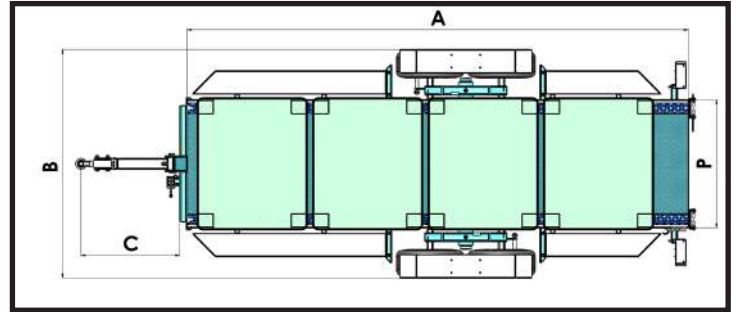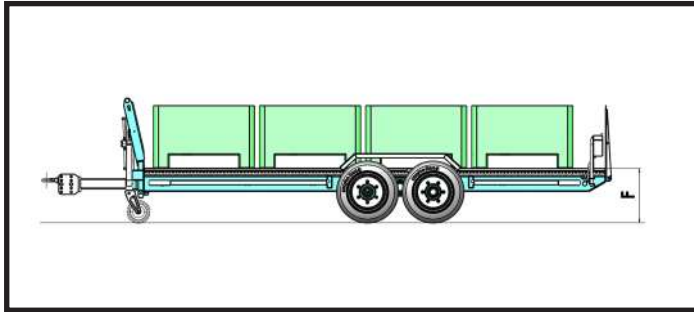

MOD.	N. Cassoni	A mm	B mm	C mm	P mm	F mm		 Kg	€
G40 RT/4 SA TA	4	4900	1800	1000	1050	500	200/60 14.5	720	





Mod. G40 RT TA LS BINS 120x100 - 120x80

MOD.	N. Cassoni	A mm	B mm	C mm	P mm	F mm		 Kg	€
G40 RT/4 LS TA	4	4050	1950	1000	1250	550	200/60 14.5	650	
G40 RT/5 LS TA	5	5050	1950	1000	1250	550	200/60 14.5	720	

Mod. G40 RT TA SUPER

MOD.	N. Cassoni	A mm	B mm	C mm	P mm	F mm		 Kg	€
G40 RT/5 super TA	5	5700	2050	1000	1250	550	10.075 15.3	850	
G40 RT/5 super SA TA	5	6050	1850	1000	1050	500	10.075 15.3	880	
G40 RT/6 super LS TA	6	6050	2050	1000	1250	550	10.075 15.3	880	
G40 RT/7 super LS TA	7	7100	2050	1000	1250	550	10.075 15.3	880	

BRAKING SYSTEM COSTS FOR ROAD APPROVAL 6000 Kg

	PNEUMATIC	
	HYDRAULIC WITH PEDAL	