

## MANURE SPREADER SPEED AF/P


## HYDRAULIC SELF LOADING MANURE SPREADER SPEED DX AF/P

- Attachment to the three points of the lift
- Hot galvanizing of the frame
- Hydraulic operation of the machine which controls the following details:
- 1) Horizontal internal roller for product grinding
- 2) External horizontal plate for product distribution to the plant
- Complete with speed adjustment valve to dose the distributed product
- Product loading with hydraulic rear door, tractor oil operation
- Tractor required minimum oil flow 40 lt
- Tractor with a total of 2 pairs of double-acting
- hydraulic jacks
- CE certificate



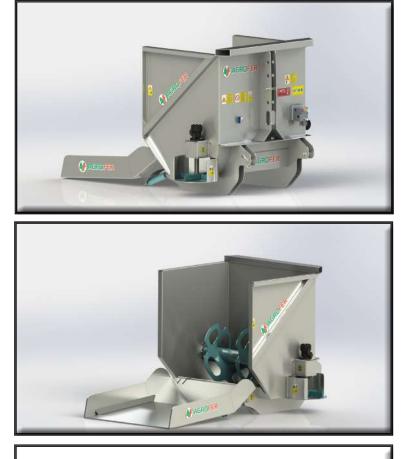





MOD.	A mm	B mm	C mm		Kg	nm 750 mm	
AF / P	1000	1600	1200	1.0 circa	400	1600	

COD.	ACCESSORIES ON REQUEST	PRICE
SPEED 001	J01 VALVE FIXED FOR SIDE FAN SPEED ADJUSTMENT	
SPEED 002	J02 REAR SUPPORT ROLLER	


## MANURE SPREADER SPEED AF/CO


## HYDRAULIC SELF LOADING MANURE SPREADER SPEED DX AF/CO

- Attachment to the three points of the lift
- Hot galvanizing of the frame
- Hydraulic operation of the machine which controls the following details:
- 1) Horizontal internal roller for product grinding
- 2) Vertical auger with horizontal external plate for product distribution to the plant
- Complete with speed adjustment valve to dose the distributed product
- Product loading with hydraulic rear door, tractor oil operation
- Tractor required minimum oil flow 40 lt
- Tractor with a total of 2 pairs of double-acting
- hydraulic jacks
- CE certificate



SUITABLE FOR CONSISTENT MANURE

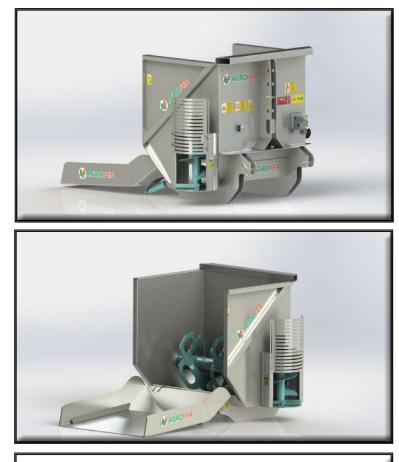



MOD.	A mm	B mm	C mm		Kg	nm 790 mm	
AF / CO	1000	1600	1200	1.0 circa	450	1600	

COD.	ACCESSORIES ON REQUEST	Price
SPEED 001	J01 VALVE FIXED FOR SIDE FAN SPEED ADJUSTMENT	
SPEED 002	J02 REAR SUPPORT ROLLER	

U